


OUTLINE INDICATES CONCEPT OF CONCAVE WALL CONTOUR TO KEEP BRICK LINING ALWAYS IN "ARCH" (COMPRESSION), BOW WALLS OUT FROM CENTER POINT, CONTINUOUS CURVE 1% OF LENGTH MINIMUM, ENDS 2%, BOTTOM 2% OF DEPTH, SHORT DIMENSION. LONG DIMENSION CONTINUOUS CURVE TO MEET DEPTH ESTABLISHED BY SIDE CONTOUR. INCREASE WALL THICKNESS AS NECESSARY. SEE SPECIFICATION CES-301 FOR MINIMUM AND MAXIMUM OFFSETS.

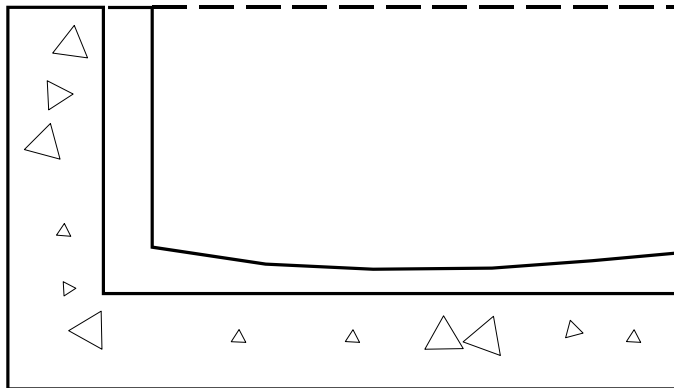

SECTION B-B

This drawing, including the principle of design, is the property of ErgonArmor and is submitted with the understanding that it will not be used for any purpose except that specified in writing by ErgonArmor. While all statements, technical information, and recommendations contained herein are based on information our company believes to be reliable, nothing contained herein shall constitute any warranty, express or implied, with respect to the products and/or services described herein and any such warranties are expressly disclaimed. We recommend that the prospective purchaser or user independently determine the suitability of our product(s) for their intended use. No statement, information or recommendation with respect to our products, whether contained herein or otherwise communicated, shall be legally binding upon us unless expressly set forth in a written agreement between us and the purchaser/user.

CED-1026 10/12 SUPERSEDES 04/01
**CONCRETE VESSEL OUTLINE, WALLS,
 AND BOTTOMS CONTOURED**
 NO SCALE
 DRAWN BY: BEF
 COPYRIGHT: ERGONARMOR
 CORROSION ENGINEERING

